

Tekniske data
Audison AV 12 D2 II


Nominal diameter	300 mm (12 in)
Impedance	2+2 Ohm
Power Handling - Peak	1100 W
Power Handling - Continuous	550 W
Sensitivity	85 dB
Frequency Response	25 - 400 Hz
Voice Coil Ø	38.6 mm
Chassis Material	ALUMINIUM
Magnet Material	HIGH DENSITY FLUX FERRITE
Magnet size D x d x h	156*60*34 mm
Voice Coil Material	CCAW
Former Material	GLASS FIBER
Cone Material	POLYPROPYLENE
Xmax	16.8 mm
Xmech	20 mm
Voice Coil Winding Height	37 mm
Gap Height	7 mm
Recommended Enclosure	27.1 l
Recommended Tuning	26,5 Hz
Ferrofluid	No

Elektrisk – akustisk data.

D	539 cm ²
Re	3,3 Ohm
Fs	23 Hz
Le	4,3 mH
Vas	6,3 l
Mms	326 g
Cms	0.15 mm/N
BL	17,4 T•m
Qts	0,5
Qes	0,5
Qms	6,7
Virkningsgrad	85db

Vægt og mål

AV 10 D2 II / AV 10 D4 II
AV 12 D2 II / AV 12 D4 II

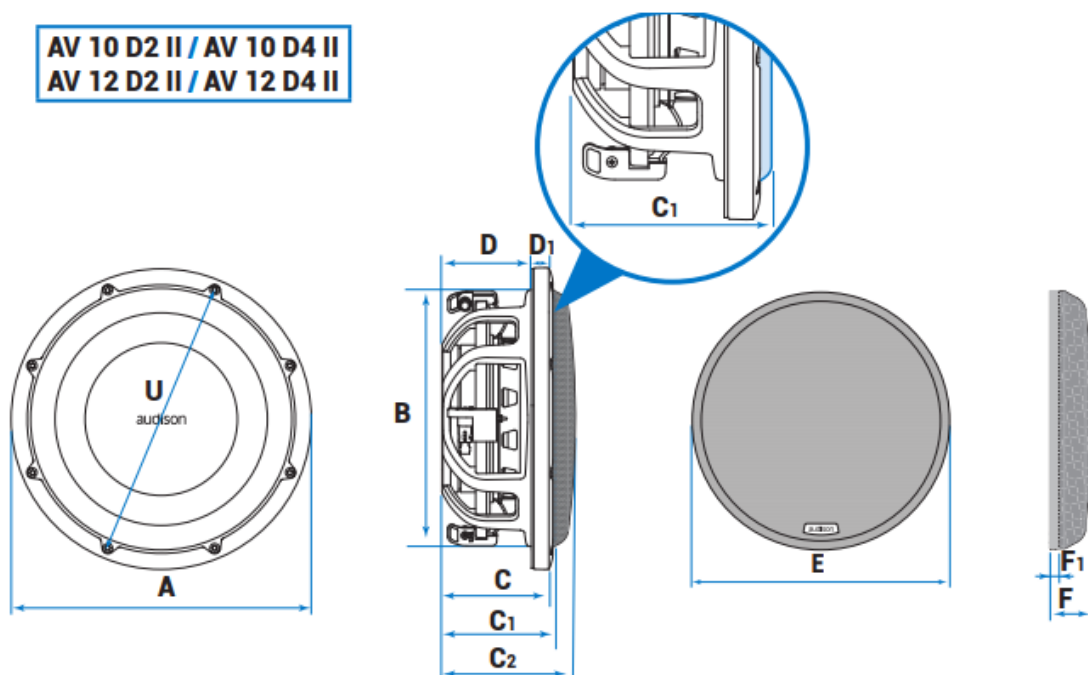

Vægt	6,6 kg
Dimension A	318.3 mm
Dimension B	282.9 mm
Dimension C	102.5 mm
Dimension C1	109 mm
Dimension C2	136.7 mm
Dimension D	88 mm
Dimension D1	14.5 mm
Dimension E	292.3 mm
Dimension F	42,6 mm