


Tekniske data
Audison AV 10 D2 II

Nominal diameter	250 mm
Impedance	2+2 Ohm
Power Handling - Peak	1100 W
Power Handling - Continuous	550 W
Sensitivity	83.5 dB
Frequency Response	25 - 400 Hz
Voice Coil Ø	38.6 mm
Chassis Material	ALUMINIUM
Magnet Material	HIGH DENSITY FLUX FERRITE
Magnet size D x d x h	134*57*36 mm
Voice Coil Material	CCAW
Former Material	GLASS FIBER
Cone Material	POLYPROPYLENE
Xmax	16.8 mm
Xmech	20 mm
Voice Coil Winding Height	37 mm
Gap Height	7 mm
Recommended Enclosure	13.2 l
Recommended Tuning	51 Hz
Ferrofluid	No
Note	The data below are specified with the VCs connected in series (2+2).

Elektrisk – akustisk data.

D	368 cm ²
Re	3,25 Ohm
Fs	35 Hz
Le	4,1 mH
Vas	15,16 l
Mms	264 g
Cms	0.079 mm/N
BL	16,2 T•m
Qts	0,63
Qes	0,7
Qms	5,5
Virkningsgrad	83,5

Vægt og mål

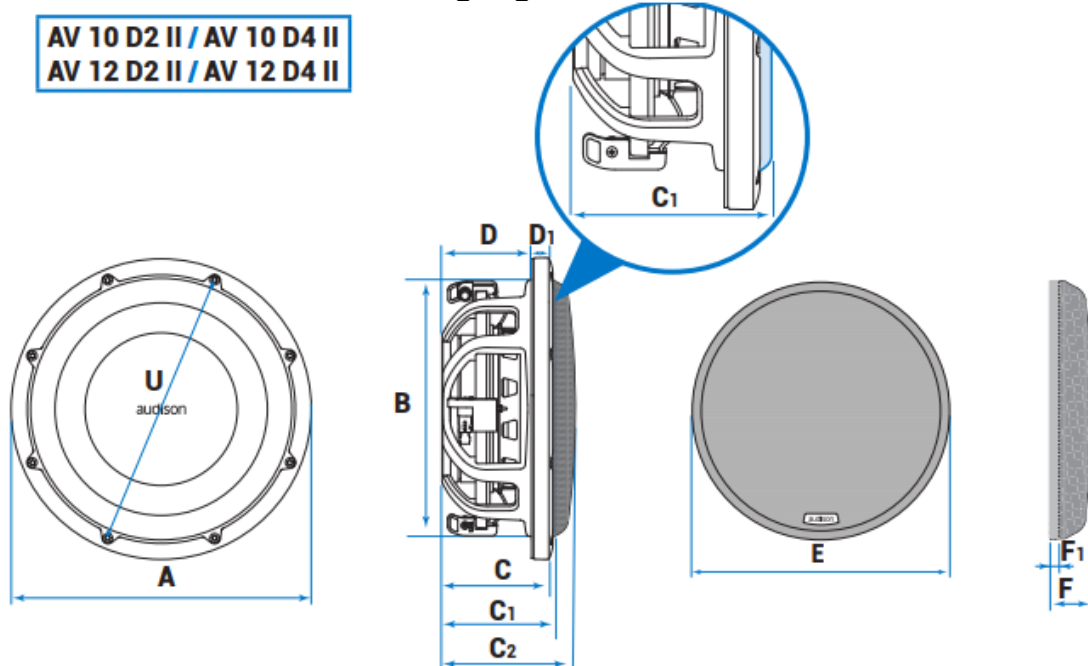

Vægt	5 kg
Dimension A	274.5 mm
Dimension B	232 mm
Dimension C	97 mm
Dimension C1	103 mm
Dimension C2	128.5 mm
Dimension D	82.6 mm
Dimension D1	14.5 mm
Dimension E	245 mm
Dimension F	40 mm