

Tekniske data

Nominal diameter	70 mm
Minimum Impedance	3.2 Ohm
Power Handling - Peak	100 W
Power Handling - Continuous	50 W
Sensitivity	90 dB
	SPL measured at 2.83V/1m;
Frequency Response	160 ÷ 13000 Hz
	(-6dB)
Voice Coil Ø	26 mm
Chassis Material	ALUMINIUM
Magnet Material	NEODYMIUM
Magnet size D x d x h	24.9-6 mm (in.)
Voice Coil Material	CCAW
Former Material	GLASS FIBER
Cone Material	SEMI-PRESSED PAPER
Surround Material	RUBBER
Xmax	1.4 mm
Xmech	3.2 mm
Voice Coil Winding Height	5.3 mm
Gap Height	4.5 mm
Crossover name	no

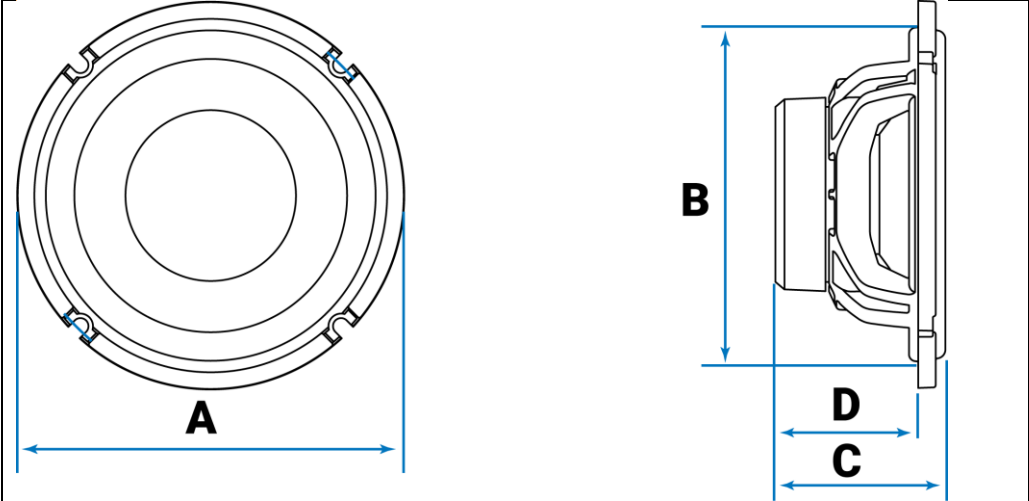
Electric-acoustic Specs

Re	2.9 Ohm
Fs	150 Hz
Le	0.1 mH
Vas	0.61 l
Mms	2.9 g
Cms	0.39 mm/N
BL	3.5 T•m
Qts	0.58
Qes	0.65
Qms	5.45
Flux Density	0.78

General

Weight	0.15 kg
--------	---------

Dimensions

	
Dimension A	84 mm
Dimension B	73 mm
Dimension C	35 mm
Dimension D	31.2 mm
Hole diameter	3.5 mm