

Tekniske data Audison AV6.5PII

Nominal diameter	165 mm
Impedance	4 Ohm
Minimum Impedance	3.1 Ohm
Power Handling - Peak	300 W
Power Handling - Continuous	150 W
Sensitivity	91 dB
	SPL measured at 2.83V/1m;
Frequency Response	45 - 7500 Hz
	(-6dB)
Voice Coil Ø	40 mm
Chassis Material	ALUMINIUM
Magnet Material	HIGH DENSITY FLUX FERRITE
Magnet size D x d x h	100 x 45 x 18 (3.9 x 1.8 x 0.7) mm (in.)
Voice Coil Material	CCAW
Former Material	GLASS FIBER
Cone Material	SEMI-PRESSED PAPER
Surround Material	RUBBER
Xmax	4.95 mm
Xmech	7.5 mm
Voice Coil Winding Height	13 mm
Gap Height	6 mm


Electric-acoustic Specs

Re	2.9 Ohm
Fs	66 Hz
Le	0.3 mH
Vas	9.09 l
Mms	15.3 g
Cms	0.38 mm/N
BL	5.5 T•m
Qts	0.57
Qes	0.61
Qms	9.06

General

Weight	1.6 kg
--------	--------

Dimensions

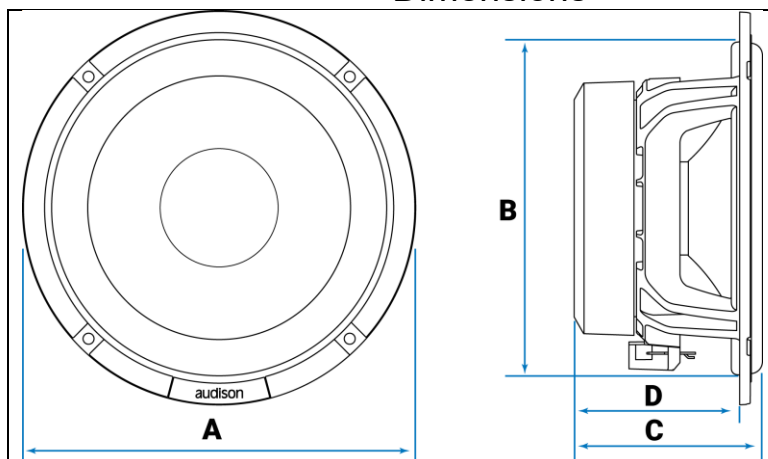

Dimension A	165 mm
Dimension B	140.8 mm
Dimension C	74.2 mm
Dimension D	69.8 mm
Centre to centre distance	155 mm
Hole diameter	4.5 mm