


Tekniske data
Audison AVBX 10 D4 II

Nominal diameter	250 mm
Impedance	4+4 Ohm
Power Handling - Peak	1100 W
Power Handling - Continuous	550 W
Sensitivity	83.5 dB
Frequency Response	25 - 400 Hz
Voice Coil Ø	38.6 mm
Chassis Material	ALUMINIUM
Magnet Material	HIGH DENSITY FLUX FERRITE
Magnet size D x d x h	134*55*36 mm
Voice Coil Material	CCAW
Former Material	GLASS FIBER
Cone Material	POLYPROPYLENE
Xmax	16.8 mm
Xmech	20 mm
Voice Coil Winding Height	37 mm
Gap Height	7 mm
Driver Displacement Volume	0,6l

Elektrisk – akustisk data.

D	368 cm ²
Re	1,82 Ohm
Fs	36 Hz
Le	1,8 mH
Vas	14,8 l
Mms	250 g
Cms	0.08 mm/N
BL	11,2 T•m
Qts	0,72
Qes	0,823
Qms	5,62
Virkningsgrad	83,5

Vægt og mål

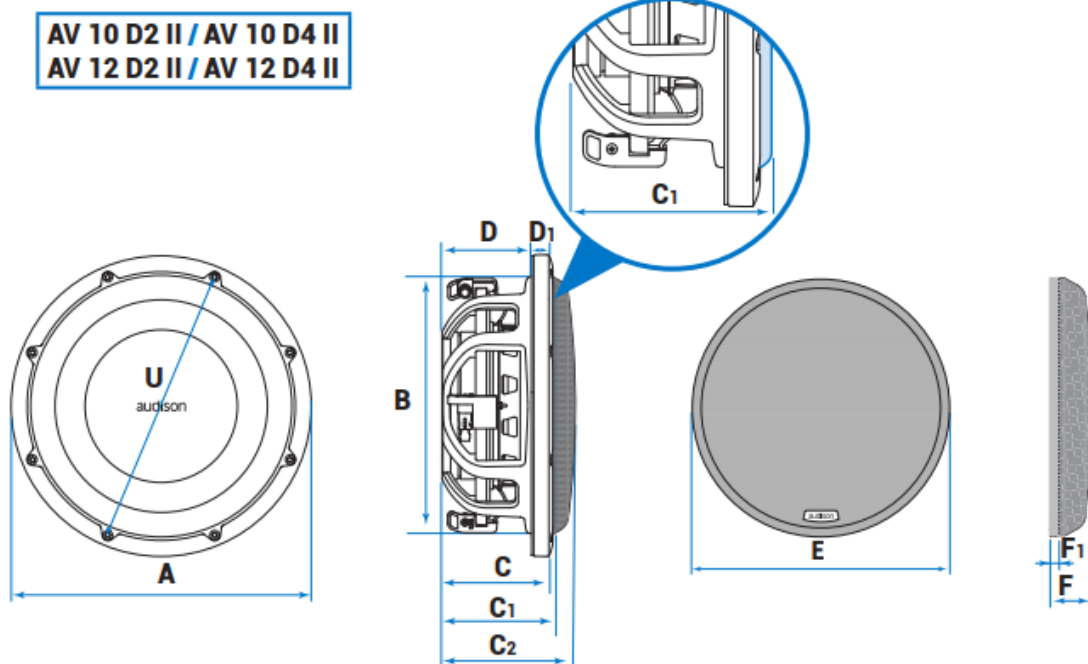

Vægt	5 kg
Dimension A	274.5 mm
Dimension B	232 mm
Dimension C	102,5 mm
Dimension C1	103 mm
Dimension C2	128.5 mm
Dimension D	82.6 mm
Dimension D1	14.5 mm
Dimension E	245 mm
Dimension F	40 mm