

Tekniske data Audison AVK6PII

Woofer Size	165 mm
Impedance	4 Ohm
Power Handling - Peak	300 W
Power Handling - Continuous	150 W
Frequency Response	45 - 7500 Hz
	(-6dB)
Voice Coil Diameter	40 mm
Magnet Material	HIGH DENSITY FLUX FERRITE
Magnet Size	100 X 45 X 18
Cone Material	SEMI-PRESSED PAPER
Crossover Type	Two Way Passive Crossover (Woofer Full/6dB Oct., Tweeter - 12dB/Oct.)
Crossover Level Adjustment	High Frequency Contour, Mid Frequency Contour, Bi-Amping, Hi Boost, Tweeter Level

Technical Specs HF

Tweeter Size	28 mm
Frequency Response	1000 - 40000 Hz
	Comply with HiRes Audio JAS, testing condition IEC 60268-5
Power Handling - Peak	180 W
	Hi-Pass filtered @ 1,8 kHz - 12dB Oct.
Voice Coil Diameter	28 mm
Dome Material	TETOLON FIBER


Electric-acoustic Specs LF

Re	2.9 Ohm
Fs	66 Hz
Mms	15.3 g
Cms	0.28
BL	5.5
Qms	9
Qes	0.61
Qts	0.57
Vas	9.09 l
Le	0.3 mH
Spl	91 dB
Xmax	4.95 mm

General

Weight Woofer	1.6 kg
Weight Tweeter	0.1 kg
Weight Crossover	0.42 kg

Dimensions

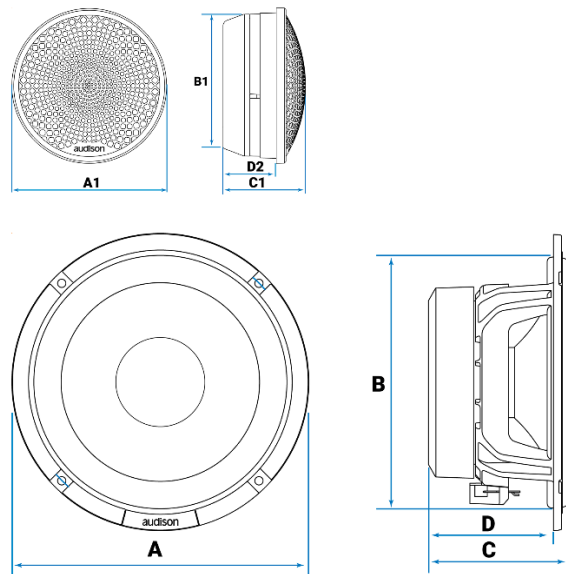

Dimension A	165 mm
Dimension B	140.8 mm
Dimension C	74.2 mm
Dimension D	69.8 mm
Dimension B2	44.9 mm
Dimension D1	16.5 mm