

Tekniske data Audison AVX6.5II

Technical Specs LF

Woofer Size	165 mm
Impedance	4 Ohm
Minimum Impedance	3.1 Ohm
Power Handling - Peak	240 W
Power Handling - Continuous	120 W
Sensitivity	91.5 dB
Frequency Response	45 ÷ 40000
Voice Coil Diameter	40 mm
Chassis Material	ALUMINIUM
Magnet Material	HIGH DENSITY FLUX FERRITE
Magnet Size	100-45-18
Voice Coil Material	CCAW
Former Material	GLASS FIBER
Cone Material	SEMI-PRESSED PAPER
Surround Material	RUBBER
Flux Density	0.84
Xmax	4.95 mm
Xmech	7.5 mm
Gap Height	6 mm
Voice Coil Winding Height	13 mm

Technical Specs HF

Tweeter Size	25.4 mm
Impedance	4 Ohm
Minimum Impedance	3.7 Ohm
Program Power	20 W
Aes Power Rating	10 W
Sensitivity	98 dB
Frequency Response	1500 - 40000
Voice Coil Diameter	25 mm
Voice Coil Material	CCAW
Former Material	ALUMINIUM
Dome Material	TELOTON FIBRE
Surround Material	TETOLON FIBRE
Magnet Material	NEODYMIUM


Electric-acoustic Specs

Re	2.9 Ohm
Fs	67 Hz
Mms	14.9 g
Cms	0.38
Bl	5.4
Qms	8
Qes	0.62
Qts	0.58
Vas	9.1 l
LE	0.3 mH
Reference Efficiency	90.5

General

Weight	1.6 kg
--------	--------

Dimensions

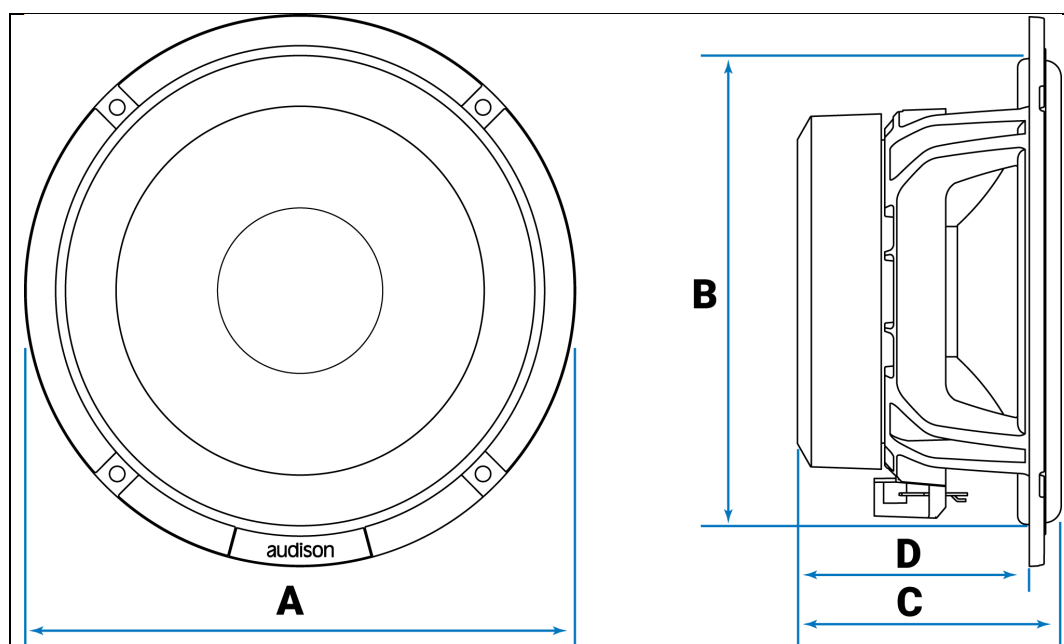

Dimension A	165 mm
Dimension B	140 mm
Dimension C	74.2 mm
Dimension D	69.8 mm

Frequency Response

