

Tekniske data Audison AVK6SII Technical Specs LF

Woofer Size	165 mm
Impedance	4 Ohm
Power Handling - Peak	250 W
Power Handling - Continuous	125 W
Frequency Response	50 - 5500 Hz
	(-6dB)
Voice Coil Diameter	36 mm
Magnet Material	HIGH DENSITY FLUX FERRITE
Magnet Size	92 x 42 x 15 mm
Cone Material	PRESSED PAPER CONE
Crossover Type	Two Way Separate case for Woofer (AVCX 2 W - Full/6dB Oct.) & Tweeter (AVCX 2 T - 12dB/Oct.)
Crossover Level Adjustment	AVCX 2 T: Tweeter Level: 0 / -1.5 dB; AVCX 2 W: Woofer Mid-Contour On / Off

Technical Specs HF

Tweeter Size	25.4 mm
Frequency Response	1200 - 40000 Hz
	Comply with HiRes Audio JAS, testing condition IEC 60268-5
Power Handling - Peak	150 W
	Hi-Pass filtered @ 1,5 kHz - 12dB Oct.
Voice Coil Diameter	25 mm
Dome Material	TETOLON FIBER


Electric-acoustic Specs LF

Re	2.9 Ohm
Fs	67 Hz
Mms	13.2 g
Cms	0.43
BL	4.9
Qms	6.76
Qes	0.67
Qts	0.61
Vas	10.28 l
Le	0.3 mH
Spl	91 dB
Xmax	4.2 mm

General

Weight Woofer	1.3 kg
Weight Tweeter	0.14 kg
Weight Crossover	0.1 kg

Dimensions

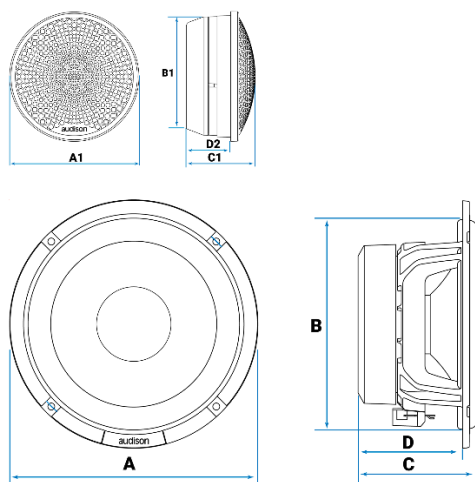

Dimension A	165 mm
Dimension B	140.8 mm
Dimension C	65.6 mm
Dimension D	61 mm
Dimension A1	43.8 mm
Dimension B1	40.8 mm
Dimension C1	25.5 mm
Dimension D1	16.1 mm