
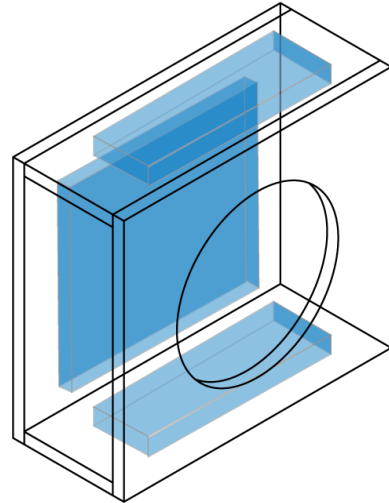



Subwoofer boks design Audison AV 12 D2 II

Sealed Box
Compact - Tech Data

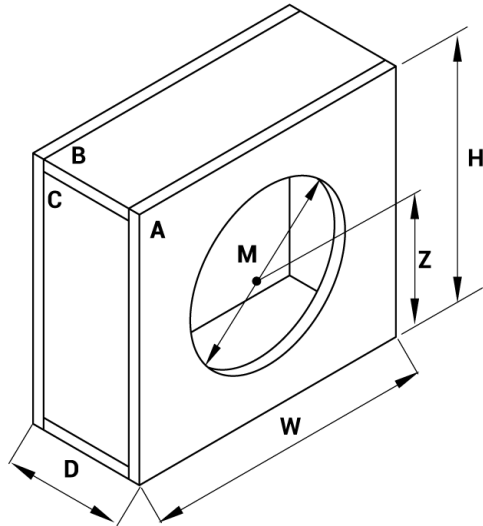

Antal liter	21
FBHz	47
QTC	1
W mm	490
H mm	406
D mm	160
Mounting Hole mm	284
Wood Thickness mm	16

Compact - Pannels Cut List


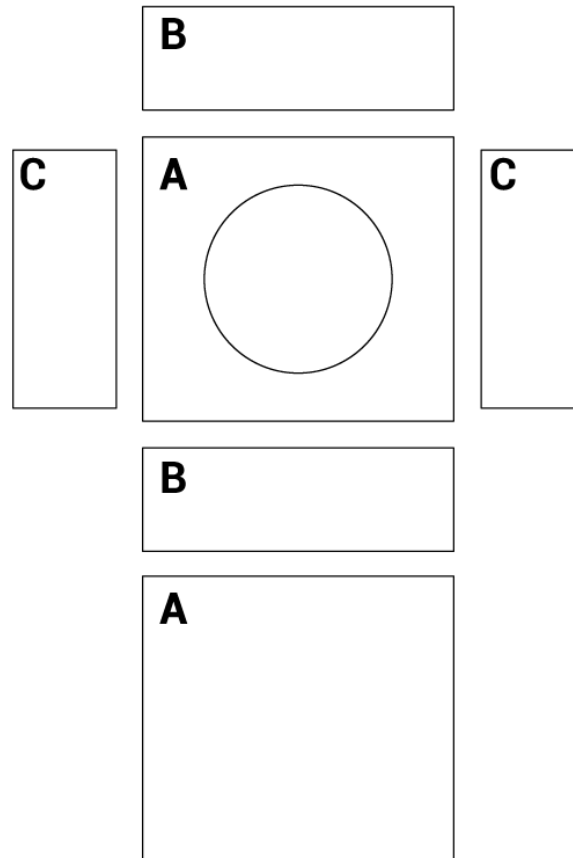


A mm	490 x 406
Qty Pcs	2
B mm	490 x 128
Qty Pcs	2
C mm	374 x 128

Sealed Box Filter


Suggested Subsonic filter cut-off	15 Hz / 24 dB Oct
Suggested Lo-pass filter cut-off	70-80 Hz / 24 dB Oct

Performance - Tech Data

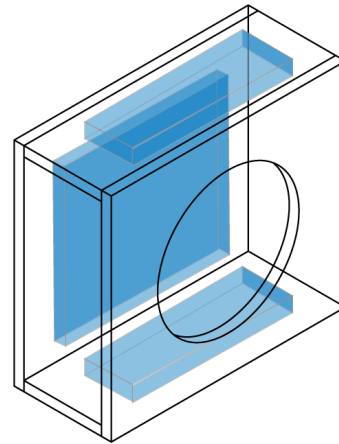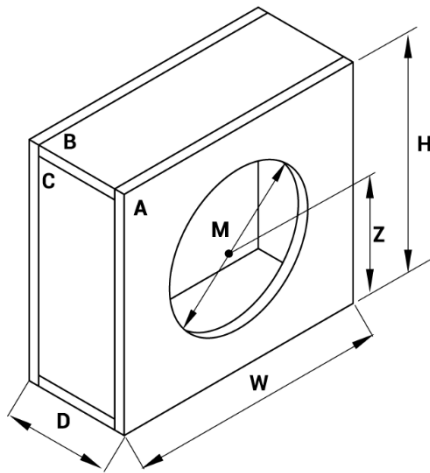

Antal liter	30
FBHz	41
QTC	0.89
W mm	612
H mm	450
D mm	160
Mounting Hole mm	284
Wood Thickness mm	16

Performance - Pannels Cut List


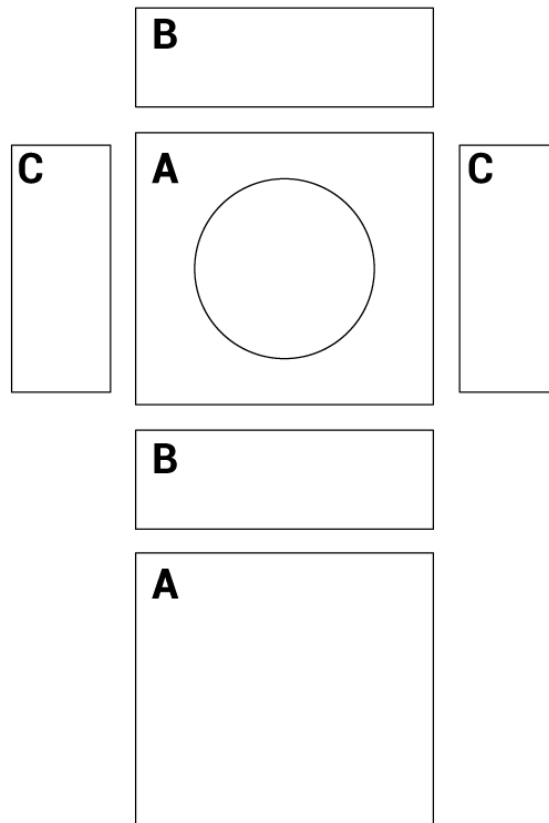


A mm	612 x 450
Qty Pcs	2
B mm	612 x 148
Qty Pcs	2
C mm	418 x 128
Qty Pcs	2

Sealed Box Filter


Suggested Subsonic filter cut-off	15 Hz / 24 dB Oct
Suggested Lo-pass filter cut-off	70-80 Hz / 24 dB Oct

Reflex Box Compact - Tech Data

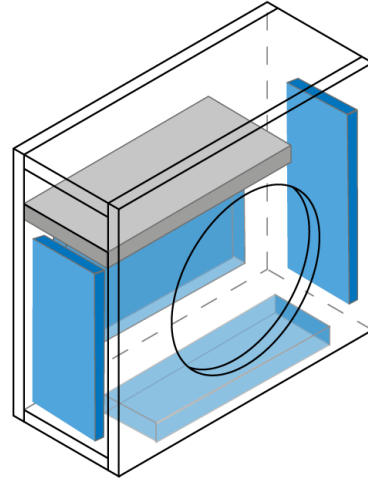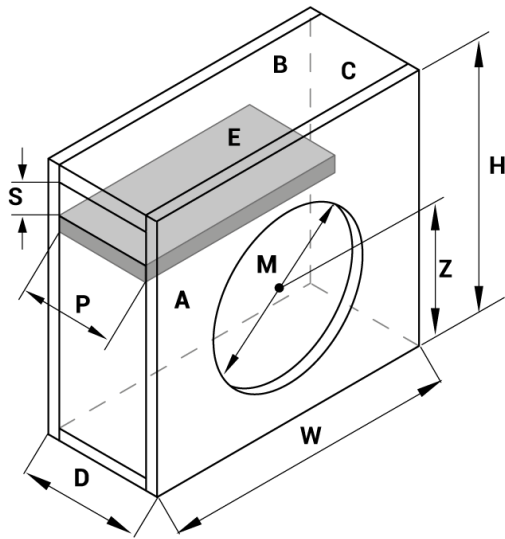

Antal liter	27,1
FBHz	26,5
W mm	859
H mm	422
D mm	130
Mounting Hole mm	284
Wood Thickness mm	16
Z mm	161
Pmm	98
Smm	82,9
Lp-Port Lengthmm	605

Compact - Pannels Cut List


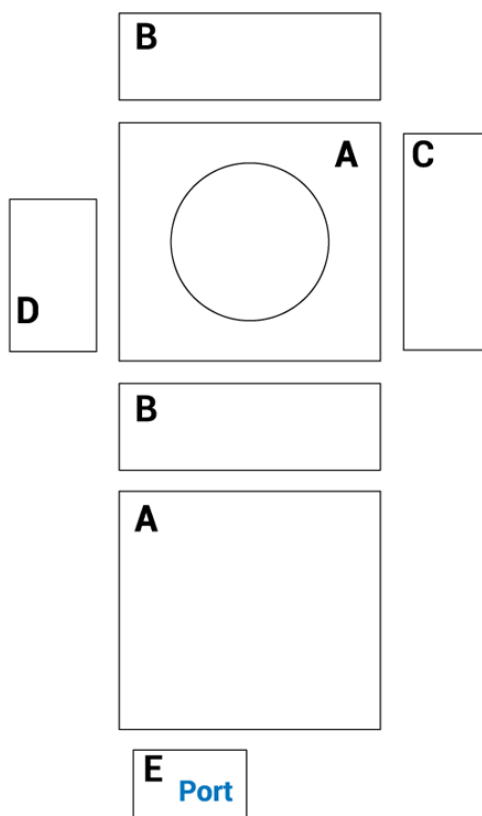


A mm	418 x 128
Qty Pcs	2
B mm	859 x 98
Qty Pcs	2
C mm	390 x 98
Qty Pcs	1
D mm	307.1 x 98
Qty Pcs	1
E mm	589 x 98
Qty Pcs	1

Reflex Box Filter


Suggested Subsonic filter cut-off	20 Hz / 24 dB Oct
Suggested Lo-pass filter cut-off	70-80 Hz / 24 dB Oct

Performance - Tech Data

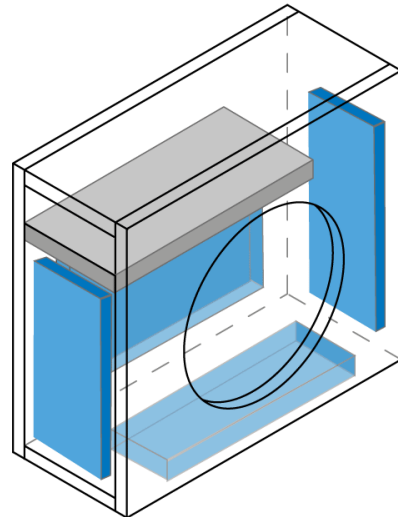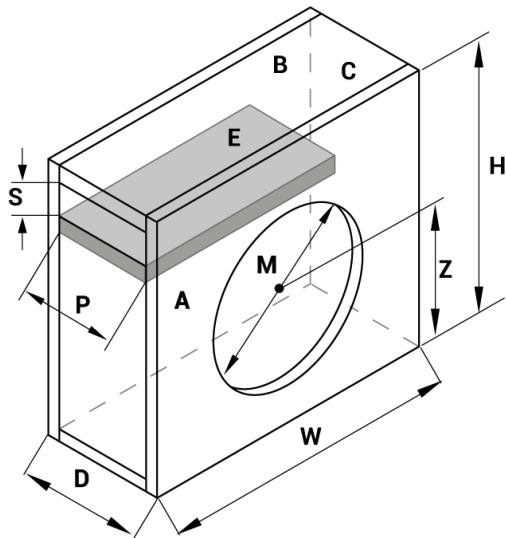

Antal liter	37
FB Hz	26,5
W mm	836
H mm	422
D mm	165
Mounting Hole mm	284
Wood Thickness mm	16
Z mm	161
P mm	133
S mm	60
Lp-Port Length mm	460

Performance - Pannels Cut List

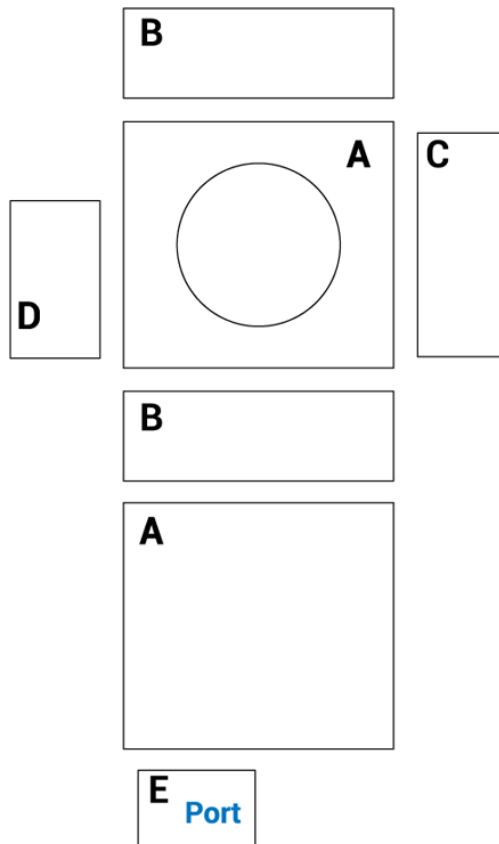

A mm	836 x 422
Qty Pcs	2
B mm	836 x 133
Qty Pcs	2
C mm	390 x 133
Qty Pcs	1
D mm	330 x 133
Qty Pcs	1
E mm	444 x 133
Qty Pcs	1

Reflex Box Filter

Suggested Subsonic filter cut-off	20 Hz / 24 dB Oct
Suggested Lo-pass filter cut-off	70-80 Hz / 24 dB Oct